


# DS-2CE1582P(N)-IRP


## 600 TVL DIS IR Bullet Camera

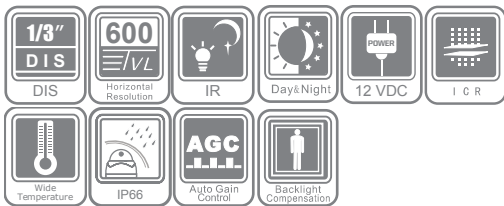

### Key features

- 600 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:  
-40°C to 60°C (-40°F to +140°F)

### Dimensions

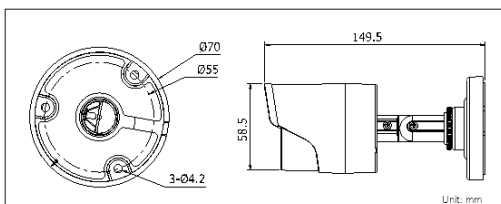

DS-2CE1582P(N)-IRP	
<b>Camera</b>	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	720 (H) x 480 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6 mm (2.8mm,6 mm optional)
	Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	600 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
<b>General</b>	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 2 W (Max. 5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	20 meters
Dimensions	Φ70x149.5 mm (Φ2.76" x5.89")
Weight	300 g (0.66 lbs)

### Available models

PAL: DS-2CE1582P-IRP  
NTSC: DS-2CE1582N-IRP